

## Organic Semiconductors for Advanced Electronics

Vol. 4 No. 6

Conducting Polymers

Light Emitting Polymers

Charge Transport  
Materials

Semiconducting Small  
Molecules

Light Emitting Metal  
Complexes

Spin Coating Equipment

Anode Substrates

Reference Materials

# Introduction

The field of organic electronics is an active emerging technology with immense promise for innovative, convenient and high-performance electronics. Breakthrough products employed in commercial technologies include organic light-emitting diodes (OLEDs) used in displays for car radios.<sup>1</sup> Organic field effect-transistors (OFETs) are showing promise as their efficiencies are being rapidly improved.<sup>2</sup> Organic photovoltaics and fuel cells also employ conducting polymers for a number of applications.<sup>3</sup> Two classes of materials are actively investigated for organic electronic applications:

**Electronic Polymers:** These materials contain an extended  $\pi$ -conjugated organic backbone, giving rise to their unique opto-electrical properties. The inherently (or intrinsically) conductive polymers (ICPs) possess the electrical properties of metals or semiconductors while exhibiting the mechanical properties and processing characteristics of polymers. Applications for ICPs include, electromagnetic-interference (EMI) shielding, conductive layers for OLEDs and OFETs, optically active layers for OLEDs, and anti-corrosion coatings for iron and steel. ICPs include polythiophene, PANI, and PPy. The light emitting polymers (LEPs) possess electronic bandgaps that allow for the emission of visible light. These polymers include PPV, CN-PPV, PFO, and PFE.

**Semiconducting Oligomers:** Small organic or organometallic molecules possessing extended  $\pi$ -conjugation that can form well-ordered crystalline films. These materials may be processed by either solution or thermal deposition techniques and include products like anthracene, rubrene, Alq<sub>3</sub>, and sexithiophene.

Sigma-Aldrich, a leader in High Technology products, offers a broad portfolio of organic semiconductor materials for your research and development needs. In addition to a wide range of polymers and oligomers, we offer a complement of monomer precursors enabling you to develop your own new materials. If you can not find a product as needed, "please bother us," at [matsci@sial.com](mailto:matsci@sial.com)

## Product Locator


Properties	Products	Abbreviations	Processing Method		Page
			Vacuum	Solution	
Electroluminescent Materials	Aluminum hydroxyquinoline	Alq <sub>3</sub>	X	X	11
	Bathocuproine	BCP		X	11
	Cyano polyphenylene vinylenes	CN-PPV		X	6
	Europium Triplets Emitters	-	X	X	11
	Polyfluorenes	PFO		X	8
	Polyfluoreneethynyls	PFE		X	8
	Polyphenylene vinylenes	PPV		X	7
	Rubrenes	-	X	X	9
Electron Transport	Aluminum hydroxyquinoline	Alq <sub>3</sub>	X	X	11
	Other metal quinolines	ZrQ <sub>2</sub> , Bq <sub>4</sub>	X	X	11
Hole Blocking	N,N'-Dimethyl-quinacridone	DMQA		X	11
Hole Injection	Copper phthalocyanine	CuPc	X	X	11
	Poly(3,4-ethylenedioxythiophene)	PEDOT/PSS		X	1
	Polyanilines	PANI		X	3
	Sexithiophenes	6T, DH-6T	X	X	2
	Tetracyano materials	TCNE, TCQF	X	X	10
Hole Transport	Polyarylamines	TPD, NPD		X	9
	Polyphenylene vinylenes	PPV		X	7
	Polyvinylphthalene	PVN		X	9
	Titanium phthalocyanine	TiPc	X		9
Inherently Conductive Polymers (ICP)	Poly(3,4-ethylenedioxythiophene)	PEDOT/PSS		X	1
	Polyanilines	PANI		X	3
	Polypyrroles	PPy		X	4
	Polythioacetylenes	PA		X	5
	Polythiophenes	P3AT		X	1
Semiconducting Oligomers	Oligothiophenes	3T, 6T, DH-6T	X	X	2
	Other Small Molecule Organics	-	X	X	9
	Pentacene	-	X	X	9

Contact us at [matsci@sial.com](mailto:matsci@sial.com) to request absorption and spectra of any light emitting material in this brochure.

# Conducting Polymers

## PEDOT

Poly(2,3-dihydrothieno-1,4-dioxin) combines optical transparency in the visible spectrum, good electrical conductivity and stability. PEDOT/PSS is the most widely used hole injecting material in OLEDs.<sup>4</sup> Sigma-Aldrich offers several grades of processable PEDOT. The EDOT monomer is available for your synthesis needs.



Cat #	Product Name	Size	Price	Structure
48,309-5	<b>PEDOT/PSS</b> 1.3 wt% in water poly(styrenesulfonate) doped	250 g	79.40	
56,059-6	<b>electronic grade, 2.8 wt% in water</b> poly(styrenesulfonate) doped	25 g 100 g	59.00 164.00	
64,978-3	<b>PEDOT-block-PEG</b> 1 wt% dispersion in propylene carbonate perchlorate doped	25 g	72.00	
64,979-1	1 wt% dispersion in nitromethane p-toluenesulfonate doped	25 g	70.50	
64,980-5	1 wt% dispersion in nitromethane perchlorate doped	25 g	73.50	
64,981-3	<b>PEDOT tetramethacrylate end-capped</b> 0.5 wt% in propylene carbonate p-toluenesulfonate doped	25 g	75.00	
64,982-1	0.5 wt% in nitromethane p-toluenesulfonate doped	25 g	75.00	
48,302-8	<b>2,3-Dihydrothieno(3,4-b)-1,4-dioxin (EDOT)</b> CAS#: 126213-50-1 MW: 142.18 g/mol	10 g	39.10	

## Polythiophenes

Some of the most extensively studied  $\pi$ -conjugated polymers, are the conducting and semiconducting poly-3-alkylthiophenes (P3AT) which are very stable and readily characterized. The mono-, di- and ring substituted polythiophenes exhibit good solubility and tunable band gaps. Applications include, OLEDs, OFETs and other molecular electronic devices.<sup>5</sup> Sigma-Aldrich offers highly regiocontrolled polyalkylthiophenes (>98.5% head-to-tail), which exhibit high charge mobilities, as well as regiorandom analogs.


Cat #	Product Names	R	Type	Size	Price	Structure
44,570-3	Poly(3-hexylthiophene-2,5-diyl)	-C <sub>6</sub> H <sub>13</sub>	Regioregular	1 g	358.50	
44,571-1	Poly(3-octylthiophene-2,5-diyl)	-C <sub>8</sub> H <sub>17</sub>	Regioregular	1 g	358.50	
45,065-0	Poly(3-dodecylthiophene-2,5-diyl)	-C <sub>12</sub> H <sub>25</sub>	Regioregular	1 g	359.50	
49,533-6	Poly(3-butylthiophene-2,5-diyl)	-C <sub>4</sub> H <sub>9</sub>	Regioregular	1 g	359.50	
49,534-4	Poly(3-decylthiophene-2,5-diyl)	-C <sub>10</sub> H <sub>21</sub>	Regioregular	1 g	359.50	
65,004-8	Poly(3-(2-methoxyethoxy)-ethoxymethylthiophene-2,5-diyl)	-	Regioregular	1 g	297.50	
65,005-6	Poly(3-(2-methoxyethoxy)-ethoxythiophene-2,5-diyl)	-	Regioregular	1 g	297.50	<p>If R<sub>1</sub> = R then R<sub>2</sub> = H If R<sub>2</sub> = R then R<sub>1</sub> = H</p>
51,082-3	Poly(3-hexylthiophene-2,5-diyl)	-C <sub>6</sub> H <sub>13</sub>	Regiorandom	1 g	359.50	
51,083-1	Poly(3-octylthiophene-2,5-diyl)	-C <sub>8</sub> H <sub>17</sub>	Regiorandom	1 g	360.50	
51,085-8	Poly(3-decylthiophene-2,5-diyl)	-C <sub>10</sub> H <sub>21</sub>	Regiorandom	1 g	284.50	
51,086-6	Poly(3-dodecylthiophene-2,5-diyl)	-C <sub>12</sub> H <sub>25</sub>	Regiorandom	1 g	343.20	
51,142-0	Poly(3-butylthiophene-2,5-diyl)	-C <sub>4</sub> H <sub>9</sub>	Regiorandom	1 g	360.50	
52,593-6	Poly(thiophene-2,5-diyl)	-	Br Terminated	1 g	197.70	
55,762-5	Poly(3-cyclohexylthiophene-2,5-diyl)	-	-	1 g	360.50	
55,763-3	Poly(3-cyclohexyl-4-methylthiophene-2,5-diyl)	-	-	1 g	360.50	



Ready to scale up? For competitive quotes on larger quantities or custom synthesis, contact Sigma-Aldrich Fine Chemicals at 1-800-336-9719 (USA), or visit [www.sigma-aldrich.com/safc](http://www.sigma-aldrich.com/safc).

## Oligothiophenes

Oligothiophenes are generating interest in conductive polymer research for their high charge mobilities and on/off ratios as *p*-type semiconductors.<sup>6</sup> Garnier et al. fabricated the first all-organic transistor based on  $\alpha$ -sexithiophene (6T). Substitution of the  $\alpha$  and  $\omega$ -positions on sexithiophene with alkyl chains increases the charge carrier mobility and improves the solubility in organic solvents, making DH-6T easier to process.



**63,321-6**  
 $\alpha,\omega$ -Dihexylsexithiophene (DH-6T)  
500 mg 93.50

### $\alpha$ -Sexithiophene (6T)

**59,468-7** 1 g 84.00

CAS NO: 88493-55-4  
MF: C<sub>24</sub>H<sub>14</sub>S<sub>6</sub>  
FW: 494.76  
mp: 290 °C (dec.)

### 3,2':5',3"-Terthiophene

**65,138-9** 1 g 105.00

CAS NO: 81294-16-8  
MF: C<sub>12</sub>H<sub>8</sub>S<sub>3</sub>  
MW: 248.39

### 2,2':5',2"-Terthiophene, 99%

**31,107-3** 250 mg 38.80  
1 g 106.00

CAS NO: 1081-34-1  
MF: C<sub>12</sub>H<sub>8</sub>S<sub>3</sub>  
FW: 248.39  
mp: 93-95 °C

### 5-Hexyl-2,2'-bithiophene, 97%

**63,051-9** 500 mg 23.40  
1 g 39.00

CAS NO: 173448-31-2  
MF: C<sub>14</sub>H<sub>18</sub>S<sub>2</sub>  
FW: 250.42  
bp: 355 °C (760 mmHg)

### 2,2'-Bithiophene, 97%

**24,163-6** 1 g 15.90  
10 g 87.60

CAS NO: 492-97-7  
MF: C<sub>8</sub>H<sub>6</sub>S<sub>2</sub>  
FW: 166.26  
mp: 32-33 °C

### 2,2'5',2''-Quaterthiophene, 96%

**54,790-5** 1 g 205.00

CAS NO: 5632-29-1  
MF: C<sub>16</sub>H<sub>10</sub>S<sub>4</sub>  
FW: 330.49  
mp: 211-214 °C


### Thiophene, 99%

**T3180-1** 5 g 17.50  
100 g 18.90  
500 g 35.60

CAS NO: 110-02-1  
MF: C<sub>4</sub>H<sub>4</sub>S  
FW: 84.14  
bp: 84 °C (760 mmHg)

## Monomers for Polythiophene Synthesis

Barbarella and co-workers recently demonstrated rapid microwave assisted synthesis of oligothiophenes via a Suzuki coupling route.<sup>7</sup> Sigma-Aldrich offers a complete line of thioboronic acids\* and halogenated thiophenes for this application. We carry functionalized thiophenes for your tailored materials.

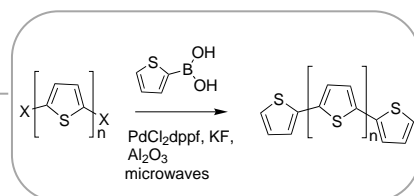

### 2-Thiopheneboronic acid

**43,683-6** 1 g 14.70  
5 g 48.50

### 5-Methyl-2-thiopheneboronic acid

**51,219-2** 1 g 30.80  
5 g 124.00

### 2,5-Dibromo-3-decylthiophene, 96%

**45,638-1** 250 mg 46.30  
1 g 92.50  
5 g 252.00

### 2,5-Dibromo-3-phenylthiophene, 97%

**52,550-2** 1 g 92.50  
5 g 252.00

### 2,5-Dibromo-3-octylthiophene, 96%

**52,548-0** 1 g 92.30  
5 g 252.00

### 2,5-Dibromo-3-dodecylthiophene, 97%

**45,640-3** 250 mg 46.30  
1 g 92.30  
5 g 252.00

### 2,5-Dibromo-3-cyclohexylthiophene, 97%

**52,551-0** 1 g 92.50  
5 g 265.00

### 2,5-Dibromo-3-butylthiophene, 96%

**52,549-9** 1 g 92.50  
5 g 265.00

### 2,5-Dibromo-3-hexylthiophene, 97%

**45,637-3** 250 mg 46.30  
1 g 92.30  
5 g 252.00

### 5,5'-Dibromo-2,2'-bithiophene, 99%

**51,549-3** 1 g 35.10  
5 g 116.00

### 3,4-Dihydroxy-thiophene-2,5 dicarboxylic acid diethyl ester

**54,736-0** 5 mL 167.00

### 3,4-Dihydroxy-thiophene-2,5 dicarboxylic acid diethyl ester, disodium salt


**54,147-8** 1 g 90.80

\*For additional thioboronic acids for Suzuki coupling, see Chemfile Vol. 4 No. 2, "Reagents for C-C Bond Formation" (GW4), available from Sigma-Aldrich.

TO ORDER: Contact your local Sigma-Aldrich office (see back cover),  
call 1-800-558-9160 (USA), or visit [sigma-aldrich.com](http://sigma-aldrich.com).

## Polyanilines

Polyaniline (PANI) is a versatile conducting polymer with a myriad of applications because of its unique physical and chemical properties.<sup>8</sup> PANI is easily processed by melt or solution processes, and is environmentally and thermally stable. PANI exists in three stable oxidation states (as shown) and a fourth, unstable, fully oxidized form known as pernigraniline. The doped emeraldine salt form of PANIs exhibit very high conductivities. Sigma-Aldrich offers a full line of the stable, doped and undoped PANIs for a variety of processing needs. We also offer high performance dopants for our undoped PANIs.

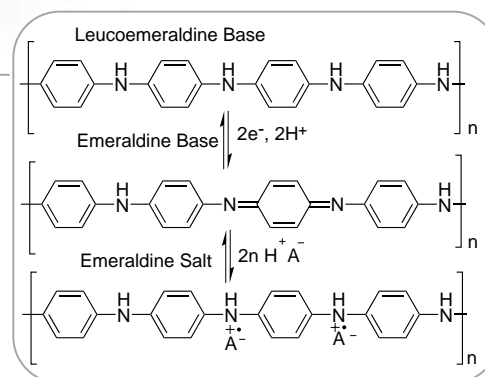

Catalog #	Polyaniline Product	Dopant	Avg. Mw	Conductivity (S/cm)	Size	Price
65,001-3	Emeraldine salt, 2-3 wt.% dispersion in xylene	Organic Sulfonic Acid	-	10-20 (as film)	10 mL 50 mL	55.25 183.90
64,999-6	Emeraldine salt, 0.5 wt.% dispersion in mixed solvents	Organic Sulfonic Acid	-	~1 (as film)	10 mL 50 mL	50.10 167.00
42,832-9	Emeraldine salt	Organic Sulfonic Acid	>15,000	2-4	5 g 25 g	34.20 113.00
53,056-5	Emeraldine salt, composite with carbon black	Organic Sulfonic Acid	-	40	5 g 25 g	20.10 66.40
57,707-3	Emeraldine salt coated on Nylon	Organic Sulfonic Acid	-	0.2	10 g	50.90
56,109-6	Emeraldine salt, ~20% wt in water, short chain grafted to lignin	Ligno-sulfonic acid	-	1-2	10 g 50 g	21.20 43.50
56,111-8	Emeraldine salt, ~20% wt in water, long chain grafted to lignin	Ligno-sulfonic acid	-	4-6	10 g 50 g	21.20 52.50
56,112-6	Emeraldine salt, powder, short chain grafted to lignin	Ligno-sulfonic acid	-	1-2	2 g 10 g	21.20 45.60
56,113-4	Emeraldine salt, powder, long chain grafted to lignin	Ligno-sulfonic acid	-	4-6	2 g 10 g	21.20 59.50
55,645-9	Emeraldine base	Undoped	5,000	-	5 g 25 g	51.60 168.50
47,670-6	Emeraldine base	Undoped	10,000	-	10 g 50 g	58.60 189.00
55,637-8	Emeraldine base	Undoped	20,000	-	5 g 25 g	43.50 141.50
55,638-6	Emeraldine base	Undoped	50,000	-	5 g 25 g	43.50 140.10
53,068-9	Emeraldine base	Undoped	65,000	-	10 g 50 g	54.60 176.50
57,637-9	Emeraldine base	Undoped	100,000	-	5 g 25 g	56.75 189.00
57,647-6	Emeraldine base	Undoped	300,000	-	5 g 25 g	56.70 189.00
53,067-0	Leucoemeraldine base	-	-	-	5 g	96.20

## Polyaniline Dopants

### Dodecylbenzenesulfonic acid (DBSA)

52,295-3 500 mL 33.30

### Bis(2-ethylhexyl) phosphate (DEHHP)

23,782-5 25 g 13.10  
100 g 35.00

### Dinonylnaphthalenesulfonic acid (DNSA)

50 wt. % solution in heptane

52,296-1 100 mL 77.80

55 wt. % solution in isobutanol

52,298-8 100 mL 90.60

### (±)-Camphor-10-sulfonic acid (β) (CSA)

14,792-3 5 g 19.30  
100 g 27.90  
500 g 108.00

### p-Toluenesulfonic Acid (pTSA)

Monohydrate 98.5+%  
ACS Reagent


40,288-5 5 g 12.50  
100 g 13.60  
500 g 42.70



Ready to scale up? For competitive quotes on larger quantities or custom synthesis, contact Sigma-Aldrich Fine Chemicals at 1-800-336-9719 (USA), or visit [www.sigma-aldrich.com/safc](http://www.sigma-aldrich.com/safc).

## Polypyrroles (PPy)

PPy exhibits high conductivity and good stability.<sup>9</sup> PPy films are easily fabricated on a number of surfaces. In the oxidized state, PPy is a radical cation charge balanced by dopant anions. PPy finds applications in batteries, chemical sensors, ion selective electrodes, and conductive coatings for nanomaterials. PPy nanowires have also been fabricated.<sup>10</sup>




Catalog #	Polypyrrole	Conductivity (S/cm)	Size	Price
57,703-0	Polypyrrole* powder	10-40 pressed pellet	5 g 25 g	39.50 131.50
48,255-2	Polypyrrole 5 wt. % solution in water	10-40 pressed pellet	100 mL	88.00
53,057-3	Polypyrrole* composite 20 wt% loading on carbon black	30 bulk	25 g	66.40
57,706-5	Polypyrrole composite, undoped 20 wt% loading on carbon black	13-20 bulk	10 g	58.30
57,817-7	Polypyrrole* composite 5 wt% loading on TiO <sub>2</sub>	0.8-1.0 pressed pellet	10 g	61.20

\*Doped with proprietary organic sulfonic acid


## New Polypyrrole Starting Materials

Sigma-Aldrich offers a complete line of monomers for the synthesis of polyethylenedioxyppyrole (PEDOP) and polypropylenedioxyppyrole (PPDOP). Ethylene and propylene substitution of pyrrole serves to enhance the electronic properties of pyrroles and the alkyl substitutions improve processability. Carboxylic ester substituted EDOPs are precursors to both PEDOP and the conducting pyrrolylene vinylenes (PPyV)<sup>11</sup> as shown in the reaction schemes. One solution processable PPyV, PDPV (R=dodecyl) has a band gap of 1.67 eV.<sup>12</sup>

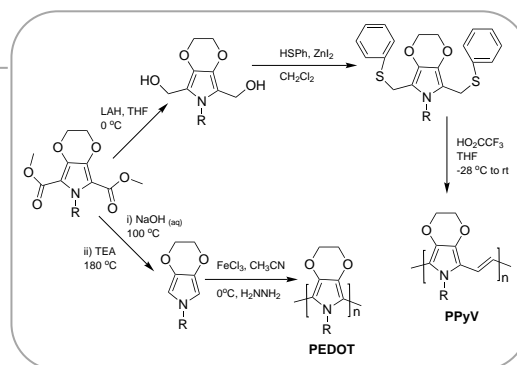

### Diethyl 1-benzyl-3,4-ethylenedioxyppyrole-2,5-dicarboxylate, 95%

63,708-4 1 g 159.50




### 3,4-Ethylenedioxyppyrole, 2% (w/v) solution in THF

64,831-0 2 mL 65.60  
10 mL 218.70




### 3,4-Ethylenedioxyppyrole-2,5-dicarboxylic acid, 95%

63,720-3 500 mg 171.00



### Diethyl-3,4-ethylenedioxyppyrole-2,5-dicarboxylate, 98%

63,716-5 500 mg 133.00




### 3,4-Propylenedioxyppyrole 2% (w/v) solution in THF

64,832-9 2 mL 65.60  
10 mL 218.70




### 3,4-Propylenedioxyppyrole-2,5-dicarboxylic acid, hydrate, 95%

63,743-2 500 mg 171.00



### Diethyl 1-benzyl-3,4-propylenedioxyppyrole-2,5-dicarboxylate

63,741-6 1 g 159.50




## Polyacetylenes

The simplest  $\pi$  conjugated polymer. In 1977 Heeger, MacDiarmid and Shirakawa discovered that polyacetylene becomes conductive upon doping with bromine or iodine vapor.<sup>13</sup> This discovery opened up the field of conductive polymer research and the trio were awarded the 2000 Nobel Prize in chemistry. Polyacetylene can be regarded as an intrinsic semiconductor with a band gap of 1.5 eV.

### Polyacetylene Synthesis

Polyacetylene can be formed by either polymerization of phenyl vinyl sulfoxide, followed by removal of benzenesulfonic acid, or by ring-opening metathesis polymerization (ROMP) of cyclooctatetraene.

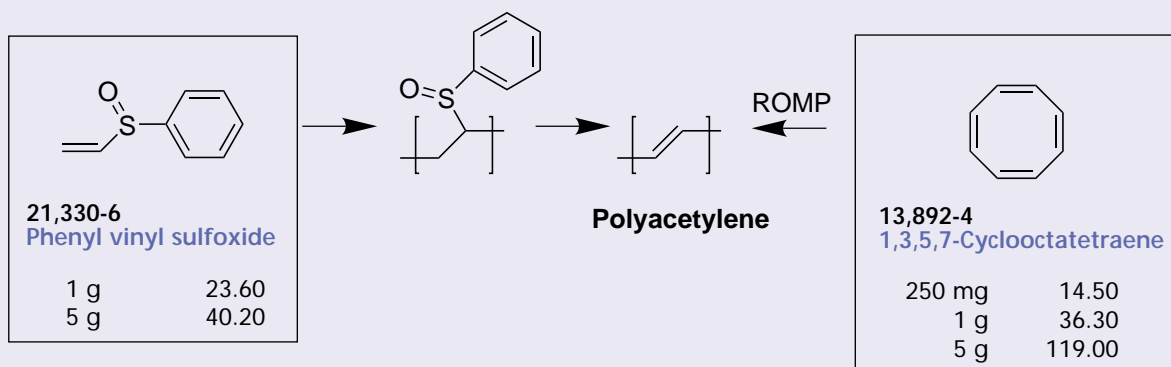


## Polythioacetylenes

Polythioacetylenes are a soluble, processable derivative of polyacetylene. When irradiated with laser light, the polymers exhibit conductivities from 10-200 S/cm.


Catalog #	Polyacetylene Products	Avg. Mn*	R group	Size	Price
44,600-9	Poly(bis(methylthio)acetylene)	4000	-CH <sub>3</sub>	50 mg 250 mg	32.90 109.00
44,601-7	Poly(bis(ethylthio)acetylene)	1200	-CH <sub>2</sub> CH <sub>3</sub>	50 mg 250 mg	32.90 109.00
44,602-5	Poly(bis(benzylthio)acetylene)	900		100 mg 250 mg	51.40 110.00

\*by vapor pressure osmometry (vpo)



## New Technologies for OLEDs

### CLD-1 Dye and Ready-to-Cast Solution



**64,413-7**  
CLD-1

100 mg	310.00
--------	--------


CLD-1 is a high  $\mu\beta$  chromophore possessing excellent thermal stability, low optical loss and low modulation voltage. Now Sigma-Aldrich offers CLD-1 as a powder and as a ready-to-cast solution with an amorphous poly-carbonate (APC) support.

**65,158-3**

10% CLD-1 in Dichloroethane (25% solids with APC support)

5 mL	385.00
------	--------

### Water Soluble Carbon Nanotubes



NEW single walled carbon nanotubes coated in a water soluble conductive polymer to aid in solution processing.

Solubility in H<sub>2</sub>O = 5.0 mg/mL

**63,923-0**

Carbon nanotube, single-walled, polyamino benzene sulfonic acid coating (65/35)

50 mg	262.50
-------	--------




Ready to scale up? For competitive quotes on larger quantities or custom synthesis, contact Sigma-Aldrich Fine Chemicals at 1-800-336-9719 (USA), or visit [www.sigma-aldrich.com/safc](http://www.sigma-aldrich.com/safc).

# Light-Emitting Polymers

## Cyano-Polyphenylene vinylenes (CN-PPV)

CN-PPV acts as the electron accepting material in light emitting polymer heterojunctions. OLEDs incorporating CN-PPV exhibit quantum efficiencies of ~30%.

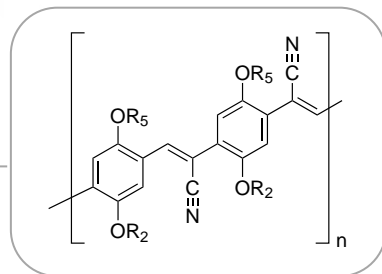

### Poly(2,5-di(3,7-dimethyloctyloxy)-cyanoterephthalylidene)

64,657-1 250 mg 195.50

### Poly(5-(3,7-dimethyloctyloxy)-2-methoxy-cyanoterephthalylidene)

64,662-8 250 mg 195.50

### Poly(5-(2-ethylhexyloxy)-2-methoxy-cyanoterephthalylidene)



64,664-4 250 mg 195.50

### Poly(2,5-di(hexyloxy)cyanoterephthalylidene)


64,665-2 250 mg 195.50

### Poly(2,5-di(octyloxy)cyanoterephthalylidene)

64,666-0 250 mg 174.50



-CH3



-CH3



-C6H13


-C6H13

-C8H17

-C8H17


## Monomers for CN-PPV

Sigma-Aldrich has a wide selection of monomers for Knoevenagel condensation to CN-PPV. If you don't see the monomer you need, send a suggestion to [matsci@sial.com](mailto:matsci@sial.com).

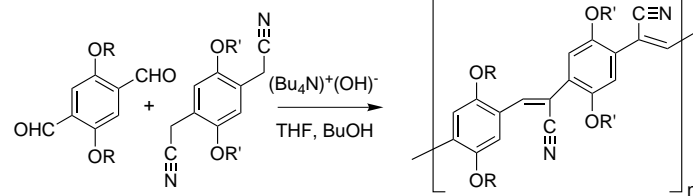


### 2-Methoxy-5-(2'-ethylhexyloxy) terephthalaldehyde

56,079-0 1 g 168.50




### 2-Methoxy-5-(3',7'-dimethyloctyloxy) terephthalaldehyde

56,078-2 1 g 167.50




### 2,5-Bis(3',7'-dimethyloctyloxy) terephthalaldehyde

56,077-4 1 g 167.50




### 2,5-Bis(3',7'-dimethyloctyloxy) benzene-1,4-diacetonitrile

56,067-7 1 g 134.00




### 2,5-Bis(octyloxy)terephthalaldehyde

56,671-3 1 g 167.50




### 2-Methoxy-5-(2'-ethylhexyloxy) benzene-1,4-diacetonitrile

56,064-2 1 g 134.00




### 2-Methoxy-5-(3',7'-dimethyloctyloxy) benzene-1,4-diacetonitrile

56,066-9 1 g 134.00




### 2,5-Bis(hexyloxy)benzene-1,4-diacetonitrile

56,069-3 1 g 126.00




### 2,5-Bis(octyloxy)benzene-1,4-diacetonitrile

56,672-1 1 g 134.00



### 2,5-Bis(hexyloxy)terephthalaldehyde

56,076-6 1 g 167.50




## Polyphenylene vinylenes (PPV)

Among the best studied light emitting conjugated polymers, PPV combines good mechanical and processing properties with excellent luminescent abilities.<sup>14</sup> Substitution of the intractable PPV backbone with alkyl and alkoxy substituents improves the solubility and tunes the optical band gap. PPV derivatives are commonly employed as the electroluminescent layer in LEPs used in mobile phones. Sigma-Aldrich presents a range of substituted PPVs and PPV co-polymers to combine emission color characteristics and processing requirements.


### Poly(2-methoxy-5-(2'-ethylhexyloxy)-1,4-phenylenevinylene) MEH-PPV

Catalog #	Avg Mn	$\lambda_{\max}$ (nm)	Size	Price
54,144-3	51,000	497	1 g	244.00
54,143-5	86,000	497	1 g	244.50
53,651-2	125,000	498	1 g	244.00




### Poly(1-methoxy-4-(o-disperse red 1))-2,5-phenylenevinylene

63,032-2	100 mg	81.70		
$\lambda_{\max}$ (nm): 465	500 mg	272.50		




### Poly(2-(2',5'-bis(2"-ethylhexyloxy)phenyl)-1,4-phenylenevinylene), BEHP-PPV

54,661-5	1 g	311.00		
$\lambda_{\max}$ (nm): 278				




### Poly(2,5-bis(1,4,7,10-tetraoxaundecyl)-1,4-phenylenevinylene)

64,421-8	1 g	350.00		
$\lambda_{\max}$ (nm): 510				




### Poly(2,5-bis(3',7'-dimethyloctyloxy)-1,4-phenylenevinylene)

54,651-8	1 g	292.50		
$\lambda_{\max}$ (nm): 488				




### Poly(2,5-bis(octyloxy)-1,4-phenylenevinylene)

55,503-7	1 g	300.00		
$\lambda_{\max}$ (nm): 491				




### Poly(2,5-dihexyloxy-1,4-phenylenevinylene)

56,080-4	1 g	278.50		
$\lambda_{\max}$ (nm): 496				



### Poly(2-methoxy-5-(3',7'-dimethyloctyloxy)-1,4-phenylenevinylene)


54,646-1	1 g	292.50		
$\lambda_{\max}$ (nm): 491				



## PPV Copolymers


### Poly(m-phenylenevinylene)-alt-(2,5-dibutoxy-p-phenylenevinylene)

57,540-2	1 g	384.00		
$\lambda_{\max}$ (nm): 403				




### Poly(m-phenylenevinylene)-alt-(2,5-dihexyloxy-p-phenylenevinylene)

57,541-0	1 g	384.00		
$\lambda_{\max}$ (nm): 403				




### Poly(m-phenylenevinylene)-alt-(2-methoxy-5-(2-ethylhexyloxy)-p-phenylenevinylene)

59,431-8	1 g	407.00		
$\lambda_{\max}$ (nm): 401				




### Poly(m-phenylenevinylene)-alt-(2-methoxy-5-octyloxy-p-phenylenevinylene)

59,441-5	1 g	407.00		
$\lambda_{\max}$ (nm): 399				




### Poly(m-phenylenevinylene)-co-(2,5-dioctoxy-p-phenylenevinylene)

55,516-9	1 g	407.50		
$\lambda_{\max}$ (nm): 402				




### Poly(o-phenylenevinylene)-alt-(2-methoxy-5-(2-ethylhexyloxy)-p-phenylenevinylene]

59,408-3	1 g	407.00		
$\lambda_{\max}$ (nm): 385				




### Poly[(p-phenylenevinylene)-alt-(2-methoxy-5-(2-ethylhexyloxy)-p-phenylenevinylene)]

59,419-9	1g	407.00		
----------	----	--------	--	--



### Poly[[2-[2',5'-bis(2"-ethylhexyloxy)phenyl]-1,4-phenylenevinylene]-co-[2-methoxy-5-(2'-ethylhexyloxy)-1,4-phenylenevinylene]]

57,026-5	1 g	294.00		
$\lambda_{\max}$ (nm): 492				



Contact us at [matsci@sial.com](mailto:matsci@sial.com) to request absorption and photoluminescence spectra or additional analytical data of any light emitting material in this brochure.



Ready to scale up? For competitive quotes on larger quantities or custom synthesis, contact Sigma-Aldrich Fine Chemicals at 1-800-336-9719 (USA), or visit [www.sigma-aldrich.com/safc](http://www.sigma-aldrich.com/safc).


## PPV Monomers

PPV materials are often prepared by the Wessling sulfonium precursor route,\* which yields PPVs upon heating cast films of the precursors. An alternate route is the solution phase dehydrohalogenation method. Sigma-Aldrich offers several precursors for your PPV synthesis.


### 2,5-Bis(chloromethyl)-1-methoxy-4-(2-ethylhexyloxy)benzene, 98%

53,625-0  1 g 102.00


### 2,5-Bis(bromomethyl)-1-methoxy-4-(2-ethylhexyloxy)benzene, 98%

53,653-9  1 g 102.00

### 2,5-Bis(chloromethyl)-1-methoxy-4-(3',7'-dimethyloctyloxy)benzene, 98%

54,644-5  1 g 167.00


### 2,5-Bis(chloromethyl)-1,4-bis(3',7'-dimethyloctyloxy)benzene, 98%

54,648-8  1 g 167.00


### 2,5-Bis(bromomethyl)-1,4-bis(3',7'-dimethyloctyloxy)benzene, 98%

54,649-6  1 g 134.00

### 2,5-Bis(bromomethyl)-2',5'-bis(2-ethylhexyloxy)-1,1'-biphenyl, 98%

54,660-7  1 g 189.00

### 2,5-Bis(bromomethyl)-1-methoxy-4-(3',7'-dimethyloctyloxy)benzene, 98%

54,645-3  1 g 134.00

### 2,5-Bis(chloromethyl)-1,4-bis(octyloxy)benzene, 98%

55,505-3  1 g 180.00

### 2,5-Bis(bromomethyl)-1,4-bis(octyloxy)benzene, 98%

55,504-5  1 g 144.50

### 2,5-Bis(chloromethyl)-1,4-bis(hexyloxy)benzene, 98%

56,073-1  1 g 166.00

### 2,5-Bis(bromomethyl)-1,4-bis(hexyloxy)benzene, 98%



56,075-8  1 g 134.00

\*Poly(p-xylylene tetrahydrothiophenium chloride) is available as a film (54,077-3) or solution (54,076-5). For this and phosphonium monomers to PPV, contact us at [matsci@sial.com](mailto:matsci@sial.com).

## Polyfluorenes (PFO, PFE)




Alkylpolyfluorenes are an attractive class of conjugated polymers for OLED applications, because of their pure blue emission and efficient electroluminescence coupled with a high charge-carrier mobility and good processability.

Catalog #	Polyacetylene Products	R	Size	Price
57,103-2	Poly[9,9-di-(2'-ethylhexylfluorenyl)-2,7'-diyl]	-C <sub>6</sub> H <sub>13</sub>	1 g	314.00
57,104-0	Poly[9,9-di-n-hexylfluorenyl-2,7'-diyl]	-C <sub>6</sub> H <sub>13</sub>	1 g	312.00
57,165-2	Poly[9,9-di-n-octylfluorenyl-2,7'-diyl]	-C <sub>8</sub> H <sub>17</sub>	500 mg	105.00
57,166-0	Poly[9,9-di-n-dodecylfluorenyl-2,7'-diyl]	-C <sub>12</sub> H <sub>25</sub>	500 mg	123.00
54,658-5	Poly[9,9-dioctylfluorenyl-2,7-yleneethynylene]	-C <sub>8</sub> H <sub>19</sub>	500 mg	313.50
55,499-5	Poly[9,9-di(2'-ethylhexyl)fluorene-2,7-yleneethynylene]		500 mg	314.50
55,497-9	Poly[9,9-di(3',7'-dimethyloctyl)fluorene-2,7-yleneethynylene]		500 mg	314.50
55,500-2	Poly[9,9-didodecylfluorenyl-2,7-yleneethynylene]	-C <sub>12</sub> H <sub>25</sub>	500 mg	314.50



## Monomers for PFO/PFE synthesis

Catalog #	Polyacetylene Products	R	Size	Price
54,662-3	9,9-Dioctyl-2,7-di-1-propynyl-9H-fluorene, 98%	-C <sub>8</sub> H <sub>17</sub>	500 mg	149.50
55,496-0	9,9-Didodecyl-2,7-di-1-propynyl-9H-fluorene, 98%	-C <sub>12</sub> H <sub>25</sub>	500 mg	153.50
55,501-0	9,9-Di(3',7'-dimethyloctyl)-2,7-di-1-propynyl-9H-fluorene, 98%		500 mg	153.50
55,502-9	9,9-Di(2'-ethylhexyl)-2,7-di-1-propynyl-9H-fluorene, 98%		500 mg	153.50
57,206-3	9,9-Didodecylfluorene-2,7-bis(trimethylene borate) 0.5M solution in toluene	-C <sub>12</sub> H <sub>25</sub>	25 mL	229.50
56,935-6	9,9-Dihexylfluorene-2,7-bis(trimethyleneborate)	-C <sub>6</sub> H <sub>17</sub>	5 g	123.50
56,668-3	9,9-Dihexylfluorene-2,7-bis(trimethyleneborate)	-C <sub>6</sub> H <sub>13</sub>	5 g	85.30
57,207-1	9,9-Di(2'-ethylhexyl)fluorene-2,7-bis(trimethylene borate) solution (0.5 M in Toluene)		25 mL	358.00
56,005-7	9,9-Didodecyl-2,7-dibromofluorene	-C <sub>12</sub> H <sub>25</sub>	25g	108.00
56,007-3	9,9-Dioctyl-2,7-dibromofluorene	-C <sub>8</sub> H <sub>17</sub>	25g	103.60
56,006-5	9,9-Dihexyl-2,7-dibromofluorene	-C <sub>6</sub> H <sub>13</sub>	25g	125.00
56,008-1	9,9-Di-(2'-ethylhexyl)-2,7-dibromofluorene		25g	116.00




# Charge Transport Materials

## Semiconducting Small Molecules

OLEDs and OFETs are commercially available because of these high-charge mobility materials. The aromatic oligomers form well ordered crystalline films of high purity through vacuum processing. Sigma-Aldrich can prepare these materials with extremely low metals content for electronic grade applications. We have additional products not listed below, so if you don't see something you need, contact us at [matsci@sial.com](mailto:matsci@sial.com) or visit our on-line catalog at [sigma-aldrich.com/matsci](http://sigma-aldrich.com/matsci).

### Anthracene, Zone Refined, 99+%

<b>33,148-1</b>		250 mg	11.30
		1 g	30.20


CAS NO: 120-12-7  
MF: C<sub>14</sub>H<sub>10</sub>  
FW: 178.23  
mp: 216-218 °C

### Rubrene

<b>55,407-3</b> , 98+%	100 mg	22.40
	500 mg	74.20

<b>55,111-2</b> , sublimed	100 mg	26.78
	500 mg	89.23


CAS NO: 517-51-1  
MF: C<sub>42</sub>H<sub>28</sub>  
FW: 532.69  
mp: >315 °C




### 9,10 Phenanthrenequinone, 99+%

<b>15,650-7</b>	5 g	28.80
	25 g	115.50

CAS NO: 84-11-7  
MF: C<sub>14</sub>H<sub>8</sub>O<sub>2</sub>  
FW: 208.22  
mp: 209-211 °C




### Pentacene

<b>P180-2</b>		50 mg	27.50
		100 mg	45.60
		1 g	324.50

CAS NO: 135-48-8  
MF: C<sub>22</sub>H<sub>14</sub>  
FW: 278.35  
mp: >300 °C

### 2,3-Benzanthracene, 98% (tetracene)

<b>B240-3</b>		100 mg	51.40
		500 mg	85.30
		1 g	144.50

CAS NO: 92-24-0  
MF: C<sub>18</sub>H<sub>12</sub>  
FW: 228.29  
mp: >300 °C


### Triphenylene, 98%

<b>T8,260-0</b>	250 mg	17.80
	1 g	49.20

CAS NO: 217-59-4  
MF: C<sub>18</sub>H<sub>12</sub>  
FW: 228.29  
mp: 197-200 °C



### Phenanthrene, 99.5+%

<b>26,087-8</b>		500 mg	34.30
		1 g	56.60

CAS NO: 85-01-8  
MF: C<sub>14</sub>H<sub>10</sub>  
FW: 178.23  
mp: 99-101 °C

### Perylene, 99.5+%

<b>39,447-5</b>	1 g	36.92
	5 g	122.20


CAS NO: 198-55-0  
MF: C<sub>20</sub>H<sub>12</sub>  
FW: 252.32  
mp: 278-280 °C (dec)



### 1,1,4,4-Tetraphenyl-1,3-butadiene, 99+%

<b>18,521-3</b>	1 g	32.30
	5 g	76.40

CAS NO: 1450-63-1  
MF: C<sub>28</sub>H<sub>22</sub>  
FW: 358.49  
mp: 207-209 °C




## Hole Transport Materials (HTM)

Sigma-Aldrich features a wide variety of molecular organic and organometallic HTMs. We also have precursors to several<sup>15</sup> polyarylamines. As always, if you need a new HTM not listed here, "please bother us," at [matsci@sial.com](mailto:matsci@sial.com).


### N,N'-Bis(3-methylphenyl)-N,N'-diphenylbenzidine, (TPD), 99%

<b>44,326-3</b>		1 g	32.86
		5 g	109.30

### Triphenylamine, 98%


<b>T8,160-4</b>		25 g	37.00
		100 g	109.00

### Poly(1-vinylnaphthalene), average Mn. ca. 100,000

<b>19,196-5</b> Mn=100,000		1 g	100.50
		<b>54,145-1</b> Mn=30,000	1 g


### N,N'-Di-[(1-naphthalenyl)-N,N'-diphenyl]-1,1'-biphenyl-4,4'-diamine, (NPD) sublimed grade, 99%

<b>55,669-6</b>	500 mg	194.06
-----------------	--------	--------




### Tri-p-tolylamine, 97%

<b>45,976-3</b>	1 g	24.00
	5 g	80.10



### Tris(4-(diethylamino)phenyl)amine, 99+%


<b>55,639-4</b>	1 g	38.06
	10 g	213.00



### Titanyl phthalocyanine


<b>40,455-1</b> 95% Dye Content	250 mg	21.84
	1 g	60.32

<b>55,618-1</b> γ-modification	250 mg	19.03
	1 g	53.20




### Copper phthalocyanine polymer, 60% dye content

<b>52,762-9</b>	1 g	31.20
	5 g	103.90



### N,N'-Diphenylbenzidine, 97%


<b>D20,520-6</b>	10 g	56.80
------------------	------	-------




## Electron Transport Materials (ETM)

ETMs find utility in OLEDs as hole-blocking materials and when co-polymerized with fluorenes as efficient electron transport materials.


### 2-(4-Biphenyl)-5-phenyl-1,3,4-oxadiazole, (PBD), 99%

**25,785-0**  5 g 35.25  
25 g 111.50


### 2-(4-Bromophenyl)-5-phenyl-1,3,4-oxadiazole, 96%

**55,364-6**  1 g 63.60  
5 g 212.00


### 2,1,3-Benzoxadiazole-5-carboxylic acid, 97%

**55,661-0**  500 mg 45.00


### 2,5-Diphenyl-1,3,4-oxadiazole, 97%

**D21,021-8**  1 g 29.74  
5 g 100.88


### 2,5-Bis(4-aminophenyl)-1,3,4-oxadiazole

**33,352-2**  250 mg 14.40  
1 g 30.00


### 5-(4-Methoxyphenyl)-1,3,4-oxadiazole-2-thiol, 97%

**54,896-0**  25 g 159.00


### 5-(4-Pyridyl)-1,3,4-oxadiazole-2-thiol, 97%

**43,856-1**  1 g 16.80  
10 g 92.30

### 5-Phenyl-1,3,4-oxadiazole-2-thiol, 97%

**39,180-8**  5 g 31.00  
25 g 103.00


### 5-(4-Methylphenyl)-1,3,4-oxadiazole-2-thiol, 97%

**54,895-2**  5 g 47.20  
25 g 157.50


## Hole Injection Materials\*

The TCN family of molecules are some of the best known electron accepting molecules used in charge transfer superconductors. They are also used as a barrier between ITO and HTMs to enhance charge injection, improving device efficiency.


### 7,7,8,8-Tetracyanoquinodimethane, (TCNQ), 98%

**15,763-5**  1 g 15.20  
5 g 51.70  
10 g 86.10


### Tetracyanoethylene, (TCNE), 98%

**T,880-9**  1 g 14.90  
5 g 50.80  
10 g 89.20  
25 g 157.00

### 2,3,5,6-Tetrafluoro-7,7,8,8-tetracyanoquinodimethane (TCNQF4), 97%

**37,677-9**  5 mg 27.30  
25 mg 89.70


### 2-[4-((Bis(2-hydroxyethyl)aminophenyl)-cyanomethylene)-2,5-cyclohexadien-1-ylidene]malononitrile

**57,210-1**  5 mg 42.30  
25 mg 141.00


\* (PEDOT:PSS is listed on page 1) Electron acceptors for superconducting materials in the Additional CT Materials table below.

## Additional Photosensitizing and CT Materials


### (Diethylamino)phenyldihydrophenylpyrazol-yl-ethenyl-N,N-diethylaniline

**46,246-2**  1 g 50.44

### [4-Bis(2-hydroxyethyl)amino]phenyl-1,1,2-ethylenetricarbonitrile

**57,212-8**  50 mg 42.30  
250 mg 141.00


### 1-Vinylnaphthalene, 95%

**53,058-1**  1 g 51.10  
5 g 167.00

### 4-(Diphenylamino)benzaldehyde diphenylhydrazone, 97%

**46,244-6**  1 g 50.90


### Phenothiazine, 98+%

**P1,483-1**  25 g 7.00  
500 g 25.00  
1kg 39.80

### 4-(Dibenzylamino)benzaldehyde diphenylhydrazone, 97%

**54,836-7**  1 g 42.60

### 4-(Diethylamino)benzaldehyde diphenylhydrazone, 97%

**46,243-8**  1 g 50.90  
25 g 273.00

### 4-(Dimethylamino)benzaldehyde diphenylhydrazone, 97%

**46,241-1**  1 g 55.40


### 3-Methyldiphenylamine, 98%

**18,351-2**  10 g 24.60  
50 g 79.70


### Di-p-tolylamine, 97%

**46,108-3**  5 g 49.00  
25 g 167.50


### Tetrathiafulvalene, (TTF), 97%

**18,318-0**  100 mg 22.90  
250 mg 45.60  
1 g 126.00

### Bis(ethylenedithio)tetrathiafulvalene (BEDT-TTF), 98%

**36,202-6**  100 mg 20.90  
500 mg 85.50

NEW



### Tris(2,2'-bipyridyl-d<sub>8</sub>)ruthenium(II) hexafluorophosphate, 99%

Deuteration of the bipyridine ligand improves the emission lifetime and quantum efficiency of the triplet emission by reducing energy losses through C-H bond vibrations. The quantum efficiencies are 20% greater than the undeuterated analog.<sup>16</sup> Sigma-Aldrich presents our newest technology for OLED and sensor applications.

<b>65,240-7</b>	100 mg	110.00	MW: C <sub>30</sub> D <sub>24</sub> F <sub>12</sub> N <sub>6</sub> P <sub>2</sub> Ru
	500 mg	440.00	mp: >300°C
			λ <sub>max</sub> : 455nm


## Light-Emitting Metal Complexes

Metal complexes are the key electron transport and emission materials for OLEDs. Europium complexes (red), Alq<sub>3</sub> (green) and LiBq<sub>4</sub> (blue) provide the complete spectrum of emission colors. The triplet emitting ruthenium complexes are also used in sensor applications. Have a complex in mind, but can't find it? Contact [matsci@sial.com](mailto:matsci@sial.com), we welcome your product suggestions.

#### 8-hydroxyquinoline, aluminum salt, Alq<sub>3</sub>, 99.995%

<b>44,456-1</b>	1 g	23.30
	5 g	76.60


CAS NO: 2085-33-8  
MF: C<sub>17</sub>H<sub>12</sub>AlN<sub>3</sub>O<sub>3</sub>  
FW: 459.44  
mp: 408-410 °C  
Application: Electroluminescent  
Green Emitter  
λ<sub>max</sub> (Emis): 511 nm (ITO Film)



#### Lithium tetra(8-hydroxyquinolinato)boron, 98%

<b>53,892-2</b>	100 mg	50.40
-----------------	--------	-------


CAS NO: 322727-85-5  
MF: C<sub>28</sub>H<sub>24</sub>BN<sub>4</sub>O<sub>4</sub>Li  
FW: 594.4  
mp: 240-241 °C  
Application: Electroluminescent  
Blue Emitter  
λ<sub>max</sub> (Emis): 512 nm (THF)



#### Dichlortris(1,10-phenanthroline) ruthenium(II) hydrate, 98%

<b>34,371-4</b>	1 g	49.90
	5 g	199.00


CAS NO: 304695-79-2  
MF: C<sub>24</sub>H<sub>16</sub>Cl<sub>2</sub>N<sub>6</sub>Ru  
FW: 712.61  
Application: Triplet Emitter



#### Tris(dibenzoylmethane)mono(5-aminophenanthroline) europium(III)

<b>53,897-3</b>	100 mg	81.95
-----------------	--------	-------


CAS NO: 352546-68-0  
MF: C<sub>32</sub>H<sub>24</sub>EuN<sub>3</sub>O<sub>6</sub>  
FW: 1017.95  
mp: 163-168 °C  
Application: Triplet  
Red Emitter  
λ<sub>max</sub> (Emis): 612 nm (H<sub>2</sub>O)



#### 8-Hydroxyquinoline, zinc salt, Znq<sub>3</sub>, 99%

<b>47,175-5</b>	5 g	36.30
	25 g	120.50


CAS NO: 13978-85-3  
MF: C<sub>18</sub>H<sub>12</sub>N<sub>2</sub>O<sub>2</sub>Zn  
FW: 353.7  
mp: 354-356 °C  
Application: Electroluminescent  
Yellow Emitter  
λ<sub>max</sub> (Emis): 544 nm (in THF)



#### Lithium tetra(2-methyl-8-hydroxyquinolinato) boron, 98%

<b>53,891-4</b>	100 mg	49.92
-----------------	--------	-------


CAS NO: 338949-42-1  
MF: C<sub>30</sub>H<sub>22</sub>BN<sub>4</sub>O<sub>4</sub>Li  
FW: 650.5  
mp: 224-225 °C  
Application: Electroluminescent  
Blue Emitter  
λ<sub>max</sub> (Emis): 504 nm (THF)



#### Chlorobis(2-phenylpyridine)rhodium(III)

<b>41,907-9</b>	250 mg	69.20
	1 g	192.50


CAS NO: 33915-80-9  
MF: C<sub>24</sub>H<sub>16</sub>Cl<sub>2</sub>N<sub>4</sub>Rh<sub>2</sub>  
FW: 893.49  
mp: 270 dec.  
Application: Triplet Emitter



#### Tris(dibenzoylmethane)mono(phenanthroline) europium(III)

<b>53,896-5</b>	100 mg	63.20
-----------------	--------	-------


CAS NO: 17904-83-5  
MF: C<sub>37</sub>H<sub>41</sub>EuN<sub>3</sub>O<sub>6</sub>  
FW: 1001.93  
mp: 172-173 °C  
Application: Triplet  
Red Emitter  
λ<sub>max</sub> (Emis): 608 nm (THF)



#### Copper(II) phthalocyanine, 99% (dye content) Sublimation Grade

<b>54,668-2</b>	200 mg	21.00
	2 g	100.88


CAS NO: 147-14-8  
MF: C<sub>24</sub>H<sub>18</sub>CuN<sub>8</sub>  
FW: 576.07



#### Cis-bis(2,2'-bipyridine)dichlororuthenium(II) hydrate

<b>28,812-8</b>	500 mg	56.40
	5 g	231.50


CAS NO: 98014-14-3  
MF: C<sub>20</sub>H<sub>16</sub>Cl<sub>2</sub>N<sub>4</sub>Ru  
FW: 484.36  
Application: Triplet Emitter



#### Tris(2,2'-bipyridyl)dichlororuthenium(II) hexa hydrate, 99.95%

<b>54,498-1</b>	250 mg	21.50
	1 g	59.50


CAS NO: 50525-27-4  
MF: C<sub>30</sub>H<sub>24</sub>Cl<sub>2</sub>N<sub>6</sub>Ru  
FW: 748.63  
mp: >300 °C  
Application: Triplet Emitter



#### Tris(benzoylacetato)mono(phenanthroline) europium(III)

<b>53,895-7</b>	100 mg	50.90
-----------------	--------	-------

CAS NO: 18130-95-5  
MF: C<sub>32</sub>H<sub>30</sub>EuN<sub>3</sub>O<sub>6</sub>  
FW: 818.7  
mp: 191-192 °C  
Application: Triplet  
Red Emitter  
λ<sub>max</sub> (Emis): 611 nm (THF)




## Using Alq<sub>3</sub>? Improve your efficiency.

Alq<sub>3</sub> is the choice electron transport material and green emission layer material for OLED applications because of its stability, processability and fluorescence properties.<sup>17</sup> Alq<sub>3</sub> performance can be improved by employing dopants like DMQA or BCP to improve luminous and power efficiency, and emission lifetime.

#### 5,12-Dihydro-5,12-dimethylquino[2,3-b]acridine-7,14-dione (DMQA)

<b>55,758-7</b>	100 mg	95.40
	500 mg	318.00


CAS NO: 19205-19-7  
MF: C<sub>22</sub>H<sub>16</sub>N<sub>2</sub>O<sub>2</sub>  
FW: 340.37  
mp: 285.8°C (dec)



#### 2,9-Dimethyl-4,7-diphenyl-1,10-phenanthroline, 96% (Bathocuproine or BCP)

<b>14,091-0</b>	500 mg	33.40
	1 G	53.10

CAS NO: 4733-39-5  
MF: C<sub>26</sub>H<sub>20</sub>N<sub>2</sub>  
FW: 360.46  
mp: 279-283°C (dec)



# Spin-Coating Equipment

These compatible, easy-to-use devices provide a convenient step-by-step method for processing metalorganic polymer solutions. The dispenser releases accurately measured amounts onto the precision spin-coater. The hot plate and UV curer are then used to bake or cure your thin film or coating. This simple system can be used to deposit metal oxide thin films, polymer coatings, and metal organic thin films. 220V equipment is CE compliant and supplied with a U.S. plug.



## Precision Spin-Coater

A two-stage spin process allows dispensing at low speeds and homogenizing the coating at high speeds. Dim.: 8 1/2 W x 8 1/2 H x 10 in. D.

### Specifications

Vacuum:	>2.1CFM
Speed stability:	<1%
Stage 1:	500-2,500rpm 2-18 seconds
Stage 2:	1,000-8,000rpm 3-60 seconds

Volts	Cat. No.
115V	<b>Z55,156-2</b>
220V	<b>Z55,158-9</b>



## Compact Hot Plate

The portable design is convenient to be used in conjunction with the spin-coater. Has digital display and internal thermocouple. Plate dim: 6 x 6 in.

### Specifications

Temp. Resolution:	1°C
Temp. Range:	120-660°F

Volts	Cat. No.
110V	<b>Z55,159-7</b>
220V	<b>Z55,160-0</b>



## UV Curer

2 tubes. Dim.: 8 1/4 x 9 1/2 in.

### Specifications

UV Wavelength:	254nm
Power output:	4 watts/tube
Turn plate:	6rpm

Volts	Cat. No.
110V	<b>Z55,161-9</b>
220V	<b>Z55,162-7</b>



## Dispenser

Dim.: 8 1/4 x 9 1/2 x 4 in.

### Specifications

Air:	80-100psi
Air port:	Quick-connect

Volts	Cat. No.
110V	<b>Z55,163-5</b>
220V	<b>Z55,164-3</b>

## Accessories

Vacuum pump	<b>Z55,167-8</b>
Environmental control chamber	<b>Z55,171-6</b>

Type CG vacuum chucks	Cat. No.
Diam.	
1 in.	<b>Z55,168-6</b>
1 1/2 in.	<b>Z55,169-4</b>
2 in.	<b>Z55,170-8</b>

# OLED Substrates

## Indium Tin Oxide Coated Substrates

Catalog #	Substrate Type	Surface Resistance (sq $\Omega$ )	Dimensions <sup>4</sup>	Passivation Layer ( $\text{\AA}$ , $\text{SiO}_2$ )	ITO Thickness ( $\text{\AA}$ )	Optical Transmittance (%)
57,827-4	Glass <sup>1</sup> slide	8-12	25 X 75 X 1.1 mm	200-300	1200-1600	>83
63,691-6	Glass <sup>1</sup> slide	15-25	25 X 75 X 1.1 mm	200-300	600-1000	>78
63,690-8	Glass <sup>1</sup> slide	30-60	25 X 75 X 1.1 mm	200-300	300-600	>84
57,635-2	Glass <sup>1</sup> slide	70-100	25 X 75 X 1.1 mm	200-300	150-300	>87
57,636-0	Aluminosilicate <sup>2</sup> glass slide	5-15	25 X 75 X 1.1 mm	none	1200-1600	>85
63,693-2	PET <sup>3</sup> slide	8-12	25 X 75 X 1.1 mm	none	1200-1600	>74
63,692-4	PET <sup>3</sup> slide	60-100	25 X 75 X 1.1 mm	none	150-300	>76
63,931-1	PET <sup>3</sup> sheet	40-45	1 ft X 1 ft X 5 mil	none	1200	>86
63,930-3	PET <sup>3</sup> sheet	50-70	1 ft X 1 ft X 5 mil	none	1000	>79
63,928-1	PET <sup>3</sup> sheet	90-110	1 ft X 1 ft X 5 mil	none	750	>77

1) Typical composition of slide is 72.6%  $\text{SiO}_2$ , 0.8%  $\text{B}_2\text{O}_3$ , 1.7%  $\text{Al}_2\text{O}_3$ , 4.6%  $\text{CaO}$ , 3.6%  $\text{MgO}$ , and 15.2%  $\text{Na}_2\text{O}$

2) Typical composition of slide is 55.0%  $\text{SiO}_2$ , 7.0%  $\text{B}_2\text{O}_3$ , 10.4%  $\text{Al}_2\text{O}_3$ , 21.0%  $\text{CaO}$ , and 1.0%  $\text{Na}_2\text{O}$

3) PET = poly(ethylene terephthalate)

4) 5 mil = 0.125 mm

## Books

### Conducting Polymers, Fundamentals and Applications: A Practical Approach

P. Chandrasekhar, Kluwer Academic Publishing, 1999, 760pp., Hardcover

Conducting polymers is utilizing the unique electronic properties of a class of easily synthesized, primarily organic materials with the predominant property of high and controllable conductivity and subsidiary properties emanating from this conductivity and the associated causative electronic structure. This book deals with the practical fundamentals and applications of conducting polymers.

Z42,253-3 \$210.00



### Conductive Electroactive Polymers: Intelligent Materials Systems, 2nd ed.

G. G. Wallace, G. M. Spinks, L. A. P. Kane-McGuire, and P. R. Teasdale, CRC Press, 2002, 248pp., Hardcover

This book provides a thorough, up-to-date introduction to conductive electroactive polymers. The authors discuss the parameters that affect the formation of important CEPs, including polypyrroles, polyanilines, and polythiophenes. They show how to use these parameters to manipulate the properties of the polymers, and they clarify the chemical and energy parameters that determine the structure and its properties. New in this edition are more details on polythiophene and polyaniline systems, an update on progress in polypyrroles, and reports on recent advances in CEP processing techniques and device fabrication.

Z55,218-6 \$189.95



### Handbook of Luminescence, Display, Materials, and Devices, 3-volume set

H. S. Nalwa, American Scientific Publishers, 2003, 1200pp., Hardcover

This book provides coverage on various aspects of organic and inorganic luminescent materials and devices. Includes organic light emitting diodes (OLEDs) and inorganic display devices including materials synthetic strategies, processing and fabrication methods, screening methods, and much more.

Z54,768-9 \$1,097.80

## References

- Faupel, F.; Dimitrakopoulos, C.; Kahn, A.; Wöll, J. *Mater. Res.* **2004**, *19*, 1887
- 2a) Dimitrakopoulos, C.; Malenfant, P. *Adv. Mater.* **2002**, *14*, 99
- 2b) Horowitz, G.; *Adv. Mater.* **1998**, *10*, 365
- 3a) Hoppe, H.; Sariciftci, N.; *J. Mater. Res.* **2004**, *19*, 1924
- 3b) Winder, C.; Sariciftci, N.S.; *J. Mater. Chem.* **2004**, *14*, 1077
- 3c) Peumans, P.; Yakimov, A.; Forrest, S.R.; *J. Appl. Phys.* **2003**, *93*, 3693
- 4) Elschner, A.; Bruder, F.; Heuer, H.-W.; Jonas, F.; Karbach, A.; Kirchmeyer, S.; Thurm, S.; Wehrmann, R.; *Synth. Met.* **2000**, *111*, 139
- 5a) Saxena, V.; Shirodkar, V.; *J. Appl. Polym. Sci.* **2001**, *77*, 1050
- 5b) Bao, Z.; Dodabalapur, A.; Lovinger, A.; *Appl. Phys. Lett.* **1999**, *74*, 260
- 6a) Garnier, F. (et al.); *Adv. Mater.* **1990**, *2*, 592
- 6b) Dodabalapur, A. (et al.); *Science* **1995**, *268*, 270
- 6c) Garnier, F.; *Acc. Chem. Res.* **1999**, *32*, 209
- 6d) Sakamoto, Y. (et al.); *J. Am. Chem. Soc.* **2001**, *123*, 4643
- 6e) Locklin, J. (et al.); *Langmuir* **2002**, *18*, 877
- 6f) Garnier, F. (et al.); *J. Am. Chem. Soc.* **1993**, *115*, 8716
- 7) Melucci, M.; Barbarella, G.; Zambianchi, M.; Bongini, A.; *J. Org. Chem.* **2004**, *69*, 4821
- 8) Stejskal, J.; Gilbert, R.; *Pure. Appl. Chem.* **2002**, *74*, 857
- 9) Vernitskaya, T.; Efimov, O.; *Russ. Chem. Rev.* **1997**, *66*, 443
- 10) Ramanathan, K.; Bangar, M.; Yun, M.; Chen, W.; Mulchandani, A.; Myung, N.; *Nano. Lett.* **2004**, *4*, 1237
- 11) Kim, I.T.; Lee, J.Y.; Lee, S.W.; *Chem. Lett.* **2004**, *33*, 46
- 12) Kim, I.T.; Elsenbaumer, R.L.; *Macromolecules* **2000**, *33*, 6407
- 13) Hall, N.; *Chem. Comm.* **2003**, *1*, 14
- 14) Akcelrud, L.; *Prog. Polym. Sci.* **2003**, *28*, 875
- 15) Shirota, Y.; Okumoto, K.; Inada, H.; *Synth. Met.* **2000**, *111*, 387
- 16) Browne, W.R.; Vos, J.G.; *Coord. Chem. Rev.* **2001**, *219*, 761
- 17) Chen, C.H.; Hung, L.S.; *Mat. Sci. Eng. Rev.* **2002**, *R 39*, 143



Ready to scale up? For competitive quotes on larger quantities or custom synthesis, contact Sigma-Aldrich Fine Chemicals at 1-800-336-9719 (USA), or visit [www.sigma-aldrich.com/safc](http://www.sigma-aldrich.com/safc).

Order: 1.800.558.9160 Technical Service: 1.800.231.8327



OLED Substrates  
Books  
References

# Sigma-Aldrich Worldwide Locations

## Argentina

SIGMA-ALDRICH DE ARGENTINA, S.A.  
Tel: 54 11 4556 1472  
Fax: 54 11 4552 1698

## Australia

SIGMA-ALDRICH PTY., LIMITED  
Free Tel: 1800 800 097  
Free Fax: 1800 800 096  
Tel: 612 9841 0555  
Fax: 612 9841 0500

## Austria

SIGMA-ALDRICH HANDELS GmbH  
Tel: 43 1 605 81 10  
Fax: 43 1 605 81 20

## Belgium

SIGMA-ALDRICH NV/SA.  
Free Tel: 0800-14747  
Free Fax: 0800-14745  
Tel: 03 899 13 01  
Fax: 03 899 13 11

## Brazil

SIGMA-ALDRICH BRASIL LTDA.  
Tel: 55 11 3732-3100  
Fax: 55 11 3733-5151

## Canada

SIGMA-ALDRICH CANADA LTD.  
Free Tel: 800-565-1400  
Free Fax: 800-265-3858  
Tel: 905-829-9500  
Fax: 905-829-9292

## China

SIGMA-ALDRICH CHINA INC.  
Tel: 86-21-6386 2766  
Fax: 86-21-6386 3966

## Czech Republic

SIGMA-ALDRICH s.r.o.  
Tel: 246 003 200  
Fax: 246 003 291

## Denmark

SIGMA-ALDRICH DENMARK A/S  
Tel: 43 56 59 10  
Fax: 43 56 59 05

## Finland

SIGMA-ALDRICH FINLAND  
Tel: 358-9-350-92 50  
Fax: 358-9-350-92 555

## France

SIGMA-ALDRICH CHIMIE S.à.r.l.  
Tel appel gratuit: 0800 211 408  
Fax appel gratuit: 0800 031 052

## Germany

SIGMA-ALDRICH CHEMIE GmbH  
Free Tel: 0800-51 55 000  
Free Fax: 0800-649 00 00

## Greece

SIGMA-ALDRICH (O.M.) LTD  
Tel: 30 210 9948010  
Fax: 30 210 9943831

## Hungary

SIGMA-ALDRICH Kft  
Tel: 06-1-235-9054  
Fax: 06-1-269-6470  
Ingyenes zold telefon: 06-80-355-355  
Ingyenes zold fax: 06-80-344-344

## India

SIGMA-ALDRICH CHEMICALS  
PRIVATE LIMITED  
Telephone  
Bangalore: 91-80-5112-7272  
Hyderabad:  
91-40-5531 5548 / 2784 2378  
Mumbai: 91-22-2579 7588 / 2570 2364  
New Delhi:  
91-11-2616 5477 / 2619 5360  
Fax  
Bangalore: 91-80-5112-7473  
Hyderabad: 91-40-5531 5466  
Mumbai: 91-22-2579 7589  
New Delhi: 91-11-2616 5611

## Ireland

SIGMA-ALDRICH IRELAND LTD.  
Free Tel: 1800 200 888  
Free Fax: 1800 600 222

## Israel

SIGMA-ALDRICH ISRAEL LTD.  
Tel: 08-948-4100  
Fax: 08-948-4200

## Italy

SIGMA-ALDRICH S.r.l.  
Telefono: 02 33417310  
Fax: 02 38010737  
Numero Verde: 800-827018

## Japan

SIGMA-ALDRICH JAPAN K.K.  
Tokyo Tel: 03-5796-7300  
Tokyo Fax: 03-5796-7315

## Korea

SIGMA-ALDRICH KOREA  
Tel: 031-329-9000  
Fax: 031-329-9090

## Malaysia

SIGMA-ALDRICH (M) SDN. BHD  
Tel: 603-56353321  
Fax: 603-56354116

## Mexico

SIGMA-ALDRICH QUÍMICA, S.A. de C.V.  
Free Tel: 01-800-007-5300  
Free Fax: 01-800-712-9920

## The Netherlands

SIGMA-ALDRICH CHEMIE BV  
Tel Gratis: 0800-0229088  
Fax Gratis: 0800-0229089  
Tel: 078-6205411  
Fax: 078-6205421

## New Zealand

SIGMA-ALDRICH PTY., LIMITED  
Free Tel: 0800 936 666  
Free Fax: 0800 937 777

## Norway

SIGMA-ALDRICH NORWAY AS  
Tel: 23 17 60 60  
Fax: 23 17 60 50

## Poland

SIGMA-ALDRICH Sp. z o.o.  
Tel: (+61) 829 01 00  
Fax: (+61) 829 01 20

## Portugal

SIGMA-ALDRICH QUÍMICA, S.A.  
Free Tel: 800 20 21 80  
Free Fax: 800 20 21 78

## Russia

SIGMA-ALDRICH RUSSIA  
TechCare Systems, Inc.  
(SAF-LAB)  
Tel: 095-975-1917/3321  
Fax: 095-975-4792

## Singapore

SIGMA-ALDRICH PTE. LTD.  
Tel: 65-6271 1089  
Fax: 65-6271 1571

## South Africa

SIGMA-ALDRICH  
SOUTH AFRICA (PTY) LTD.  
Tel: 27 11 979 1188  
Fax: 27 11 979 1119

## Spain

SIGMA-ALDRICH QUÍMICA S.A.  
Free Tel: 900101376  
Free Fax: 900102028

## Sweden

SIGMA-ALDRICH SWEDEN AB  
Tel: 020-350510  
Fax: 020-352522  
Outside Sweden Tel: +46 8 7424200  
Outside Sweden Fax: +46 8 7424243

## Switzerland

FLUKA CHEMIE GmbH  
Swiss Free Call: 0800 80 00 80  
Tel: +41 81 755 2828  
Fax: +41 81 755 2815

## United Kingdom

SIGMA-ALDRICH COMPANY LTD.  
Free Tel: 0800 717181  
Free Fax: 0800 378785  
Tel: 01747 833000  
Fax: 01747 833313

## United States

SIGMA-ALDRICH  
P.O. Box 14508  
St. Louis, Missouri 63178  
Toll-free: 800-325-3010  
Call Collect: 314-771-5750  
Toll-Free Fax: 800-325-5052  
Tel: 314-771-5765  
Fax: 314-771-5757  
**Internet:**  
sigma-aldrich.com



P.O. Box 355  
Milwaukee, WI 53201  
USA

Return Service Requested

Order/Customer Service 1-800-325-3010 • Fax 1-800-325-5052  
Technical Service 1-800-325-5832 • sigma-aldrich.com/techservice

Development/Bulk Manufacturing Inquiries Sigma-Aldrich Fine Chemicals 1-800-336-9719


World Headquarters • 3050 Spruce St., St. Louis, MO 63103 • (314) 771-5750

We are committed to the success of our Customers, Employees and Shareholders through leadership in Life Science, High Technology and Service.

The SIGMA-ALDRICH Family



EEL  
01571-40519  
0094

©2003 Sigma-Aldrich Co. Printed in USA Sigma brand products are sold through Sigma-Aldrich, Inc.  
Sigma-Aldrich, Inc. warrants that its products conform to the information contained in this and other Sigma-Aldrich publications. Purchaser must determine the suitability of the product(s) for their particular use. Additional terms and conditions may apply. Please see reverse side of the invoice or packing slip. SIGMA and  are registered trademarks of Sigma-Aldrich Co. and its division Sigma-Aldrich Biotechnology LP. Riedel-de Haen®: trademark under license from Riedel-de Haen GmbH.